

RECESSED VENT FOR SUPPLY AND EXHAUST AIR

DESCRIPTION

- Recessed vent for supply and exhaust air, for flexible use in all interior spaces
- Flush, recessed installation in ceilings and walls; comes with mounting bracket and cardboard guard against construction site dust
- 100 percent free cross section for DN 100 air ducts
- Combination option with tecanno inserts for air regulation and filtration
- Flush cover guarantees unchanging design
- Symmetrical, flow-optimised passage of air
- Protected design patent, hand crafted in Germany
- Made of sheet steel with electrostatic powder coating (RAL colour 9016-20, layer thickness approx. 60 µm)

TECHNICAL DATA

Manufacturer	Tecanno
Type	Vent ONE PLUS 100
Dimensions L x W x H (mm)	160 x 160 x 30
Connecting Piece ø (mm)	99
Weight (g)	510
Standard RAL colour	9016-20
Item No.	0101100-9016-20

ACCESSORIES	VOLUME FLOW REGULATOR	FILTER INSERT	REPLACEMENT FILTER (5 x)
Item No.	10100	20100	30100

Accessories, if required, must be ordered separately.

MATERIAL

Made of sheet steel with electrostatic powder coating (RAL colour 9016-20, layer thickness approx. 60 µm).



Front view

Back view


Side view

TENDER SPECIFICATION

Tecanno air vent ONE PLUS 100 for supply and exhaust air in design-type construction. For installation in ceilings and walls via 100 mm connecting pieces. 100 percent freely usable cross section. Can be combined with VOLUME FLOW REGULATOR or FILTER INSERT from Tecanno. The flush cover ensures a consistently slim design with a symmetrical, flow-optimized air throughput. Vent made of sheet steel with electrostatic powder coating (RAL 9016-20). Hand crafted in Germany. Registered design patent. Manufacturer: Tecanno
Type: Vent ONE PLUS 100
Dimensions L x W x H (mm): 160 x 160 x 30
Item No.: 0101100-9016-20

CONFIGURATION

The air vent has a 100 percent freely usable cross-section that accepts a VOLUME FLOW REGULATOR or FILTER INSERT. The VOLUME FLOW REGULATOR can be combined with a filter. Adding a VOLUME FLOW REGULATOR to the air vent allows the air flow rate to be regulated. This facilitates a variety of acoustic data and pressure reductions. For exhaust air filtration, the FILTER INSERT with 3M High Air Flow (HAF) filter material is ideal. The two inserts can be inserted into the vent connecting piece separately and can also be ordered separately. The flush cover hides the hybrid system and ensures a consistently slim design.

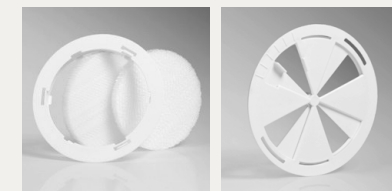

FILTER INSERT 100

VOLUME FLOW REGULATOR 100

ACCESSORIES

To supplement the air vents, we provide inserts for air regulation or air filtration.

- VOLUME FLOW REGULATOR: For supply or exhaust air. The VOLUME FLOW REGULATOR for air regulation can be combined with a filter (Item: REPLACEMENT FILTER) to allow exhaust air regulation.
- FILTER INSERT: For exhaust air. The FILTER INSERT must be combined with a filter. It provides a free filtration surface (exhaust air cannot be regulated).
- REPLACEMENT FILTER: 5 filters for use in the VOLUME FLOW REGULATOR or FILTER INSERT.

You will find more information under Configuration (to the left) and on the relevant accessories' data sheets.

ORDERING INFORMATION

Air vent: Vent ONE PLUS 100
Accessories: VOLUME FLOW REGULATOR 100 or FILTER INSERT 100 (comes with 2 filters)

Example order


Position 1: Vent ONE PLUS 100
Position 2: VOLUME FLOW REGULATOR 100*

* The VOLUME FLOW REGULATOR for air regulation is not integrated into the vent and must be ordered separately, as required. If neither the FILTER INSERT nor the VOLUME FLOW REGULATOR is indicated on the order, the order will be shipped without accessories.

VENT ONE PLUS 100

DEFINITIONS


Vol in m³/h: Volume flow rate per air vent
 α: Volume flow regulator opening degree in %
 Δp in Pa: Total pressure loss
 L_{WA} in dB(A): A-weighted sound power level

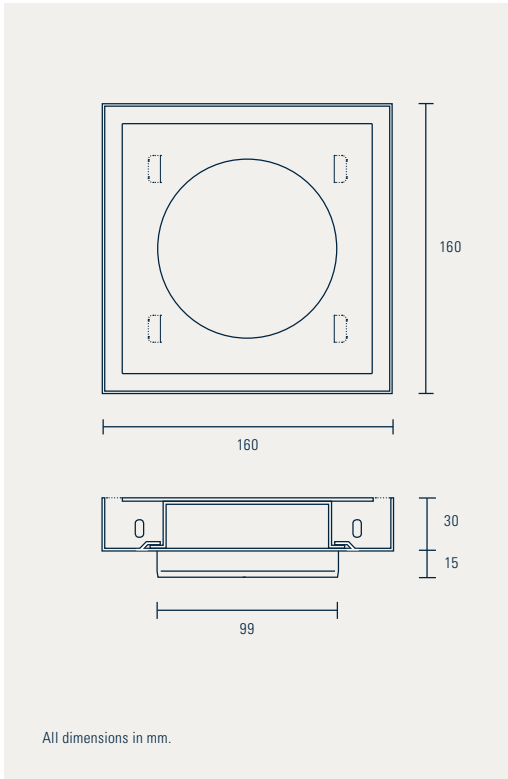


SOUND POWER LEVEL/PRESSURE REDUCTION

The flow rate is set by turning the volume flow regulator (α = degree of opening), which can be inserted into the vent connecting piece as required. Alternatively, the filter insert serves as a dust filter. Without any insert, the valve has a freely usable cross section. The volume flow regulator can be combined with a filter.


With volume flow regulator

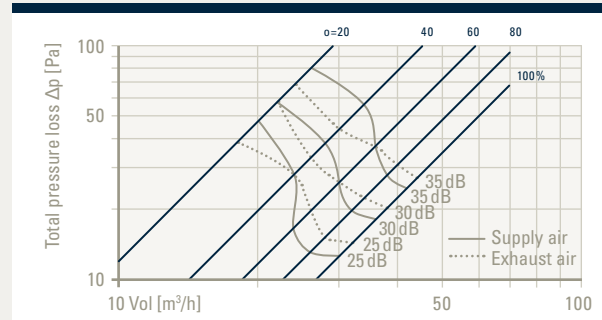

With filter insert/without insert

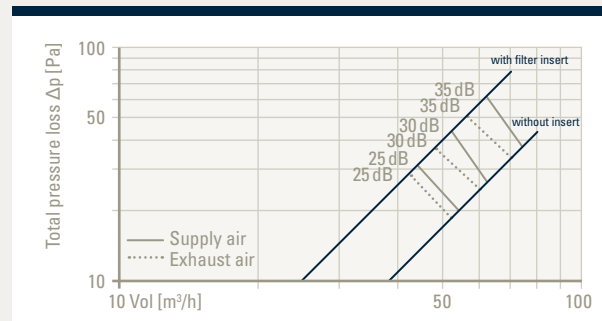

With volume flow regulator and filter

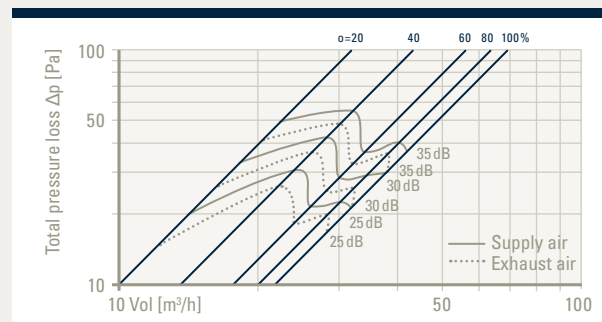


TRAJECTORY LENGTH


The trajectory length $l_{0,2}$ displayed in the diagram indicates the distance between outlet and the point in the air current (Isotherm) at which the speed drops to 0.2 m/s.

Recommended installation for supply air: Ceiling installation: 0.5 m distance from both sides of corner to vent edges. Wall installation: 0.1 m distance from both sides of corner to vent edges. For exhaust air, no minimum distances.


With volume flow regulator

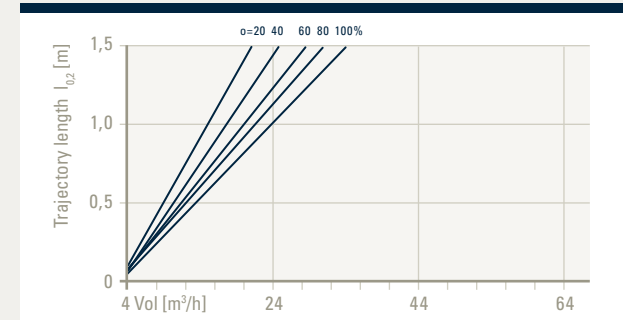

With filter insert/without insert

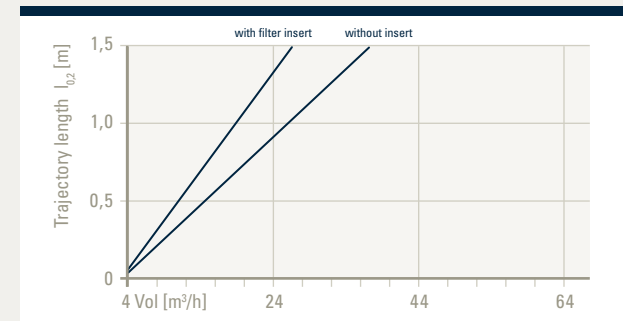

With volume flow regulator and filter

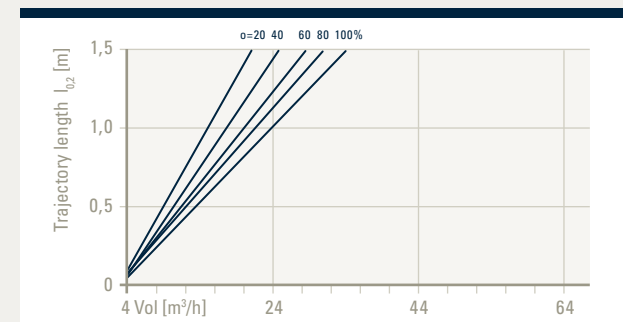

RECESSED VENT FOR SUPPLY AND EXHAUST AIR

DESCRIPTION

- Recessed vent for supply and exhaust air, for flexible use in all interior spaces
- Flush, recessed installation in ceilings and walls; comes with mounting bracket and cardboard guard against construction site dust
- 100 percent free cross section for DN 125 air ducts
- Combination option with tecanno inserts for air regulation and filtration
- Flush cover guarantees unchanging design
- Symmetrical, flow-optimised passage of air
- Protected design patent, hand crafted in Germany
- Made of sheet steel with electrostatic powder coating (RAL colour 9016-20, layer thickness approx. 60 µm)

TECHNICAL DATA


Manufacturer	Tecanno
Type	Vent ONE PLUS 125
Dimensions L x W x H (mm)	200 x 200 x 40
Connecting Piece ø (mm)	124
Weight (g)	790
Standard RAL colour	9016-20
Item No.	0101125-9016-20

ACCESSORIES	VOLUME FLOW REGULATOR	FILTER INSERT	REPLACEMENT FILTER (5 x)
Item No.	10125	20125	30125

Accessories, if required, must be ordered separately.

MATERIAL

Made of sheet steel with electrostatic powder coating (RAL colour 9016-20, layer thickness approx. 60 µm).

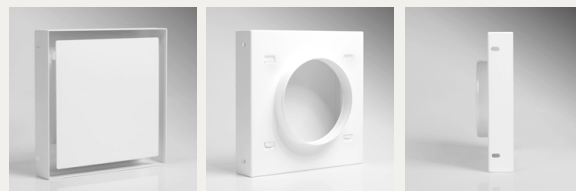

Front view

Back view


Side view

TENDER SPECIFICATION

Tecanno air vent ONE PLUS 125 for supply and exhaust air in design-type construction. For installation in ceilings and walls via 125 mm connecting pieces. 100 percent freely usable cross section. Can be combined with VOLUME FLOW REGULATOR or FILTER INSERT from Tecanno. The flush cover ensures a consistently slim design with a symmetrical, flow-optimized air throughput. Vent made of sheet steel with electrostatic powder coating (RAL 9016-20). Hand crafted in Germany. Registered design patent. Manufacturer: Tecanno
Type: Vent ONE PLUS 125
Dimensions L x W x H (mm): 200 x 200 x 40
Item No.: 0101125-9016-20

CONFIGURATION

The air vent has a 100 percent freely usable cross-section that accepts a VOLUME FLOW REGULATOR or FILTER INSERT. The VOLUME FLOW REGULATOR can be combined with a filter. Adding a VOLUME FLOW REGULATOR to the air vent allows the air flow rate to be regulated. This facilitates a variety of acoustic data and pressure reductions. For exhaust air filtration, the FILTER INSERT with 3M High Air Flow (HAF) filter material is ideal. The two inserts can be inserted into the vent connecting piece separately and can also be ordered separately. The flush cover hides the hybrid system and ensures a consistently slim design.

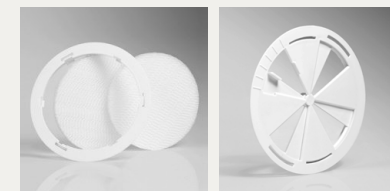

FILTER INSERT 125

VOLUME FLOW REGULATOR 125

ACCESSORIES

To supplement the air vents, we provide inserts for air regulation or air filtration.

- VOLUME FLOW REGULATOR: For supply or exhaust air. The VOLUME FLOW REGULATOR for air regulation can be combined with a filter (Item: REPLACEMENT FILTER) to allow exhaust air regulation.
- FILTER INSERT: For exhaust air. The FILTER INSERT must be combined with a filter. It provides a free filtration surface (exhaust air cannot be regulated).
- REPLACEMENT FILTER: 5 filters for use in the VOLUME FLOW REGULATOR or FILTER INSERT.

You will find more information under Configuration (to the left) and on the relevant accessories' data sheets.

ORDERING INFORMATION

Air vent: Vent ONE PLUS 125
Accessories: VOLUME FLOW REGULATOR 125 or FILTER INSERT 125 (comes with 2 filters)

Example order


Position 1: Vent ONE PLUS 125
Position 2: VOLUME FLOW REGULATOR 125*

* The VOLUME FLOW REGULATOR for air regulation is not integrated into the vent and must be ordered separately, as required. If neither the FILTER INSERT nor the VOLUME FLOW REGULATOR is indicated on the order, the order will be shipped without accessories.

VENT ONE PLUS 125

DEFINITIONS

Vol in m³/h: Volume flow rate per air vent
 α: Volume flow regulator opening degree in %
 Δp in Pa: Total pressure loss
 L_{WA} in dB(A): A-weighted sound power level

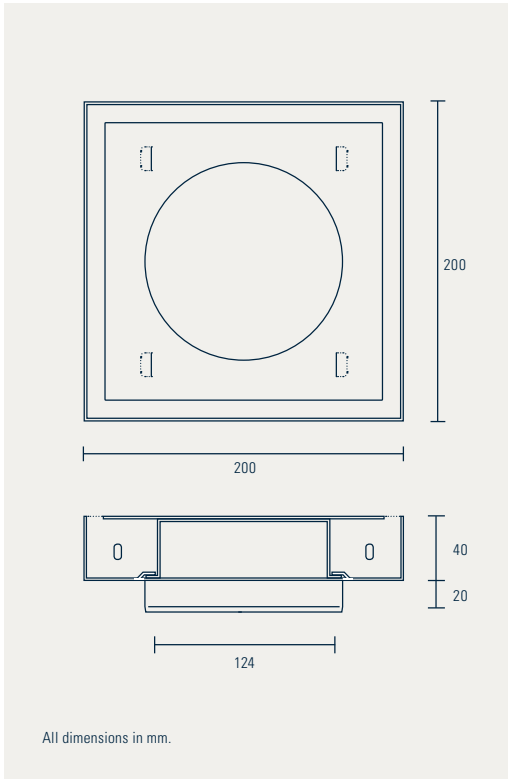


All dimensions in mm.


SOUND POWER LEVEL/PRESSURE REDUCTION

The flow rate is set by turning the volume flow regulator (α = degree of opening), which can be inserted into the vent connecting piece as required. Alternatively, the filter insert serves as a dust filter. Without any insert, the valve has a freely usable cross section. The volume flow regulator can be combined with a filter.


With volume flow regulator

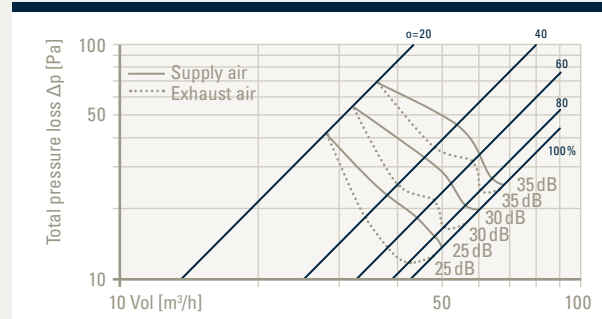

With filter insert/without insert

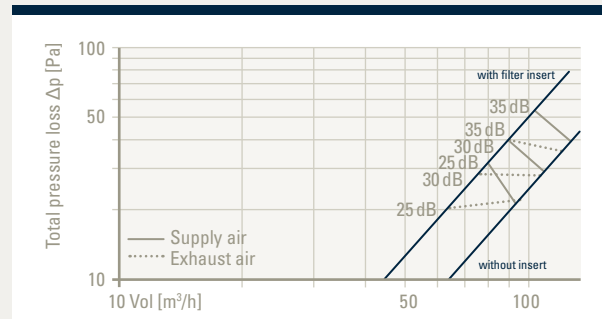

With volume flow regulator and filter

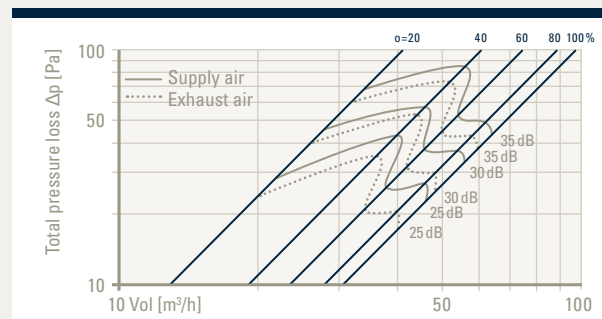


TRAJECTORY LENGTH


The trajectory length $l_{0,2}$ displayed in the diagram indicates the distance between outlet and the point in the air current (Isotherm) at which the speed drops to 0.2 m/s.

Recommended installation for supply air: Ceiling installation: 0.5 m distance from both sides of corner to vent edges. Wall installation: 0.1 m distance from both sides of corner to vent edges. For exhaust air, no minimum distances.


With volume flow regulator

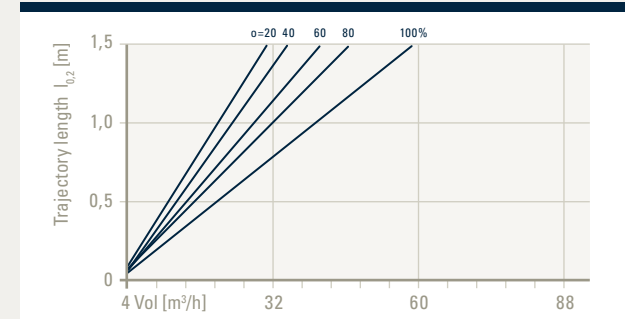

With filter insert/without insert

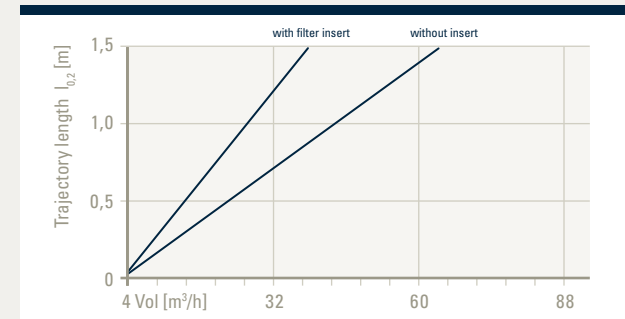

With volume flow regulator and filter

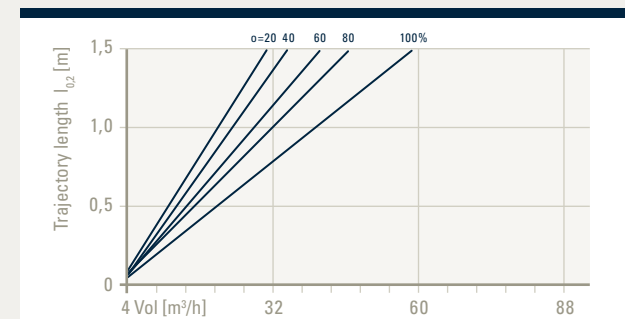

EINBAUVENTIL FÜR ZU- UND ABLUFT

BESCHREIBUNG


- Einbauventil für Zu- und Abluft, in allen Innenräumen flexibel einsetzbar
- Flächenbündige Unterputzmontage in Decken und Wänden; Montageanschlusswinkel im Lieferumfang enthalten
- 100 Prozent frei nutzbarer Querschnitt für DN 160 Lüftungsrohre
- Bündige Abdeckung garantiert stets gleichbleibendes Design
- Symmetrischer, strömungsoptimierter Luftdurchlass
- Geschütztes Geschmacksmuster, handgearbeitet in Deutschland
- Aus Stahlblech mit elektrostatischer Pulverbeschichtung (RAL Farbton 9016-20, Schichtdicke ca. 60 µm)

TECHNISCHE DATEN

Fabrikat	Tecanno
Typ	Ventil ONE PLUS 160
Abmessungen L x B x H (mm)	256 x 256 x 40
Anschlussstutzen ø (mm)	159
Gewicht (g)	1216
Standardfarbe RAL	9016-20
Artikel-Nummer	0101160-9016-20

MATERIAL

Ventil aus Stahlblech mit elektrostatischer Pulverbeschichtung (RAL Farbton 9016-20, Schichtdicke ca. 60 µm).

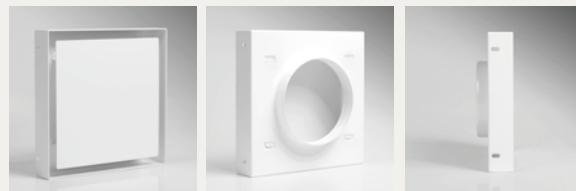

Frontansicht

Rückansicht

Seitenansicht

AUSSCHREIBUNGSTEXT

Tecanno Lüftungsventil ONE PLUS 160 für Zu- und Abluft in Design-Bauart. Für den Einbau in Decken und Wände über 160 mm Anschlussstutzen. Hundert Prozent freier Querschnitt. Die bündige Federblech-Abdeckung sorgt für ein konstant klares Design mit einem symmetrischen, strömungsoptimierten Luftdurchlass. Ventil aus Stahlblech mit elektrostatischer Pulverbeschichtung (RAL 9016-20). Handgearbeitet in Deutschland. Geschütztes Geschmacksmuster.

Fabrikat: Tecanno

Typ: Ventil ONE PLUS 160

Abmessungen L x B x H (mm): 256 x 256 x 40

Artikel-Nummer: 0101160-9016-20

EINSTELLUNG

Das Lüftungsventil hat einen hundert Prozent frei nutzbaren Querschnitt. Die bündige Abdeckung verbirgt den freien Querschnitt und sorgt für ein konstant klares Design.

BESTELLINFORMATION

Lüftungsventil: Ventil ONE PLUS 160


VENTIL ONE PLUS 160

DEFINITIONEN

Vol in m³/h: Volumenstrom je Lüftungsventil
 Δp in Pa: Gesamtdruckverlust
 L_{VA} in dB(A): A-bewerteter Schallleistungspegel

SCHALLLEISTUNGSPEGEL/DRUCKVERLUST

Das Lüftungsventil hat einen hundert Prozent frei nutzbaren Querschnitt. Im Diagramm ist der Druckverlust in Pa im Verhältnis zum Volumenstrom in m³/h dargestellt. Im Kennlinienfeld sind außerdem die Schwellen des Schallleistungspegels in dB(A) hervorgehoben.

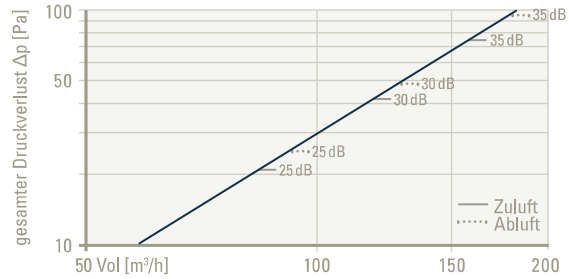

WURFWEITE

Die Wurfweite $l_{0,2}$ wie in dem Diagramm dargestellt, gibt die Entfernung zwischen Auslass und dem Punkt im Luftstrom (Isotherm) an, in dem die Geschwindigkeit auf 0,2 m/s gesunken ist.

Einbauempfehlung für Zuluft: Deckeneinbau: 0,5 m Eckabstand bis Ventilkante.
 Wandeinbau: 0,1 m Eckabstand bis Ventilkante. Bei Abluft keine Mindestabstände.

